

Overview

WS-C2960-24TT-L is one of the Cisco Catalyst 2960 Series switches. Cisco Catalyst 2960 Series switches support voice, video, data, and highly secure access. They also deliver scalable management as your business needs change. The Common Features are included: Enhanced security including Cisco TrustSec for providing authentication, access control, and security policy administration, Multiple Fast or Gigabit Ethernet performance options, Cisco EnergyWise for power management, Scalable network management.

Quick Specs

Figure 1 shows the appearance of the Cisco WS-C2960-24TT-L switch and its accessories.



Table 1 shows the Quick Spec of the WS-C2960-24TT-L

Product Code	WS-C2960-24TT-L
Enclosure Type	Rack-mountable - 1U
Feature Set	LAN Base
Uplink Interfaces	2 x 10/100/1000 TX uplinks
Downlink Ports	24 x Ethernet 10/100 ports
Throughput	6.5 Mpps
Backplane Capacity	16 Gbps
DRAM	16 MB
Dimensions	1.73 x 17.5 x 9.3 in.
Package Weight	8.15 Kg

Product Details

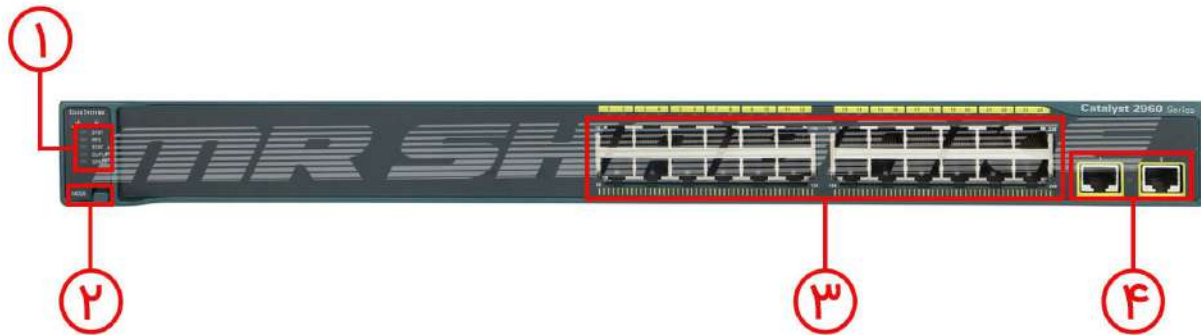


Figure 2 shows the front panel of the Cisco 2960-24TT-L switch.

(1)	LED display	(3)	24 x Ethernet 10/100 ports
(2)	Mode Button	(4)	2 x 10/100/1000 TX uplinks

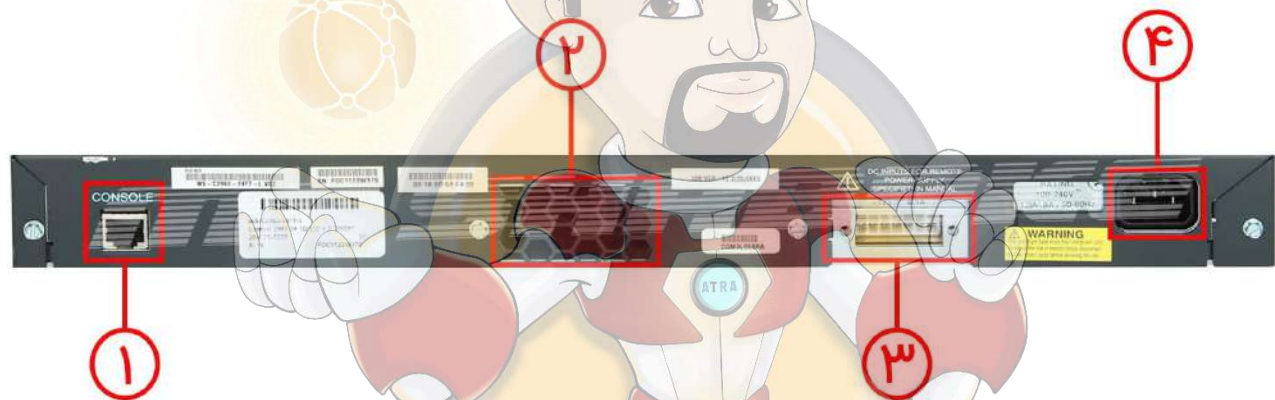


Figure 3 shows the back panel of the Cisco 2960-24TT-L switch.

(1)	RJ45 Console Port	(3)	RPS Connector
(2)	Fan Exhaust	(4)	AC power connector


Compare to Similar Items

Table 3 shows the comparison of similar items.

Models	WS-C2960-24TT-L	WS-C2960-24TC-L
PoE Available	24 x Ethernet 10/100 ports	24 x Ethernet 10/100 ports
Ports	2 x 10/100/1000 TX uplinks	2 dual-purpose uplinks
Available PoE Power	LAN Base	LAN Base

Specification

WS-C2960-24TT-L Specification	
Type	Fixed
Topology	Ethernet (10/100BaseTX) Ethernet (10/100/1000BaseT)
Maximum Port density	24 10/100 ports
Uplinks	2 10/100/1000 ports
Modular/Expansion Slots	n/a
Architecture	Layer 2 Switching (basic connectivity), Layer 2 Switching (intelligent services), Layer 3 Switching, Voice Enabled
Form Factor	Fixed, Rack Mountable, Standalone/Clustering
Dimensions	1.73 x 17.5 x 9.3 in.
DRAM	16 MB
Features	
Specialized Service Modules	n/a
Security	
DHCP Snooping	
Dynamic ARP Inspection	
IP Source Guard	
RP Rate Limiters	
TCP Intercept	
802.1x	
Port Security	
Dynamic VLANs	
Private VLANs	
Private VLAN Edge	
Secure Shell	
SNMPv3	
Unicast RPF	
ACLs (L2-L4)	
Kerberos	
TACACS+	
RADIUS	
High Availability/Resiliency	
Hardware Redundancy	External Redundant Power Supply
High Availability/Resiliency	PVST, Broadcast Suppression, Unicast Suppression, Multicast Suppression, Spanning Tree, Portfast, Uplink Fast, Backbone Fast, 802.1s, 802.1w

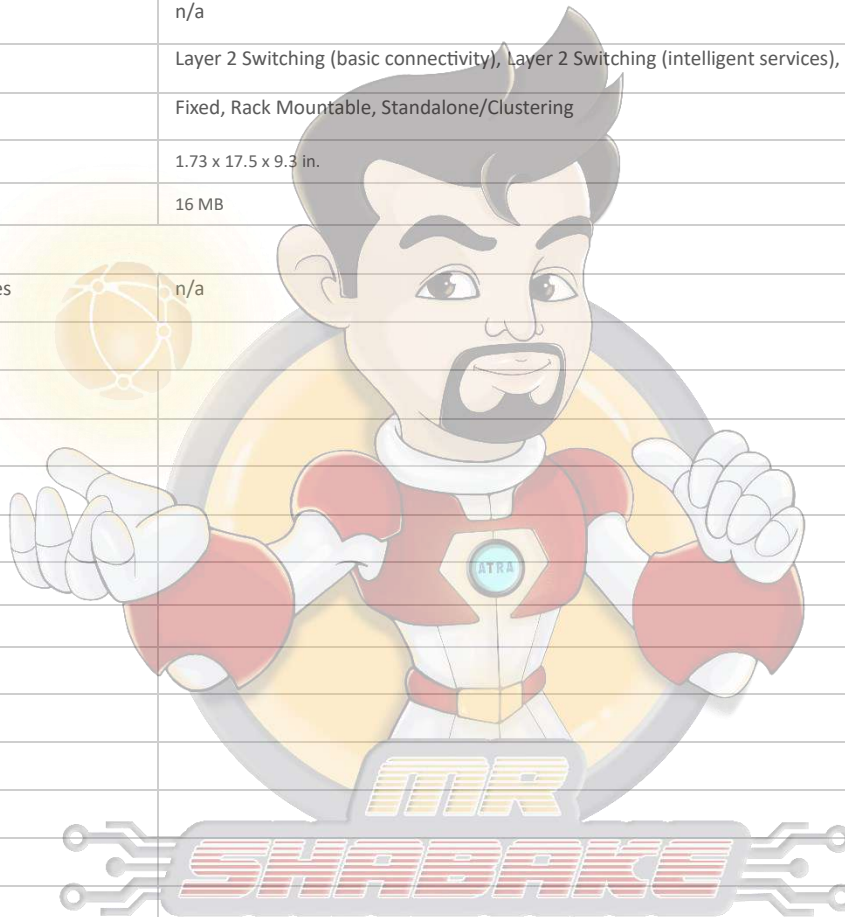

Management	
Management features	SPAN, RSPAN, CiscoView, Cisco Discover Protocol (CDP), Virtual Trunking Protocol (VTP), Telnet Client, BOOTP, TFTP, CiscoWorks, CWSI, RMON, SNMP, Clustering, Web-Based Management
Scalability	
WAN Interface Support	n/a
Throughput	6.5 Mpps
Backplane Capacity	16 Gbps
Number of VLANs	255

شما میتوانید کلیه تجهیزات شبکه را با گارانتی و ضمانت اصالت کالا از [فروشگاه اینترنتی مستر شبکه](#) تهیه کنید.

مقالات مرتبط :

- [کانفیگ سوئیچ سیسکو](#)
- [نحوه IP دادن به روتر و سوئیچ سیسکو](#)
- [قابلیت SPAN در سوئیچ های سیسکو](#)
- [معرفی سوئیچ هایی با قابلیت POE](#)
- [14 نکته مهم در انتخاب سوئیچ شبکه](#)
- [نحوه آپدیت IOS سوئیچ سیسکو](#)
- [پیکر بندی VLAN بر روی سوئیچ سیسکو](#)
- [اتصال پورت های SFP و RJ45 در سوئیچ ها](#)
- [راهنمای خرید سوئیچ های POE](#)
- [تفاوت پروتکل 802.1Q و ISL چیست؟](#)
- [پروتکل SNMP یا پروتکل مدیریت شبکه چیست؟](#)

